


Last Name: \_\_\_\_\_

Address: \_\_\_\_\_

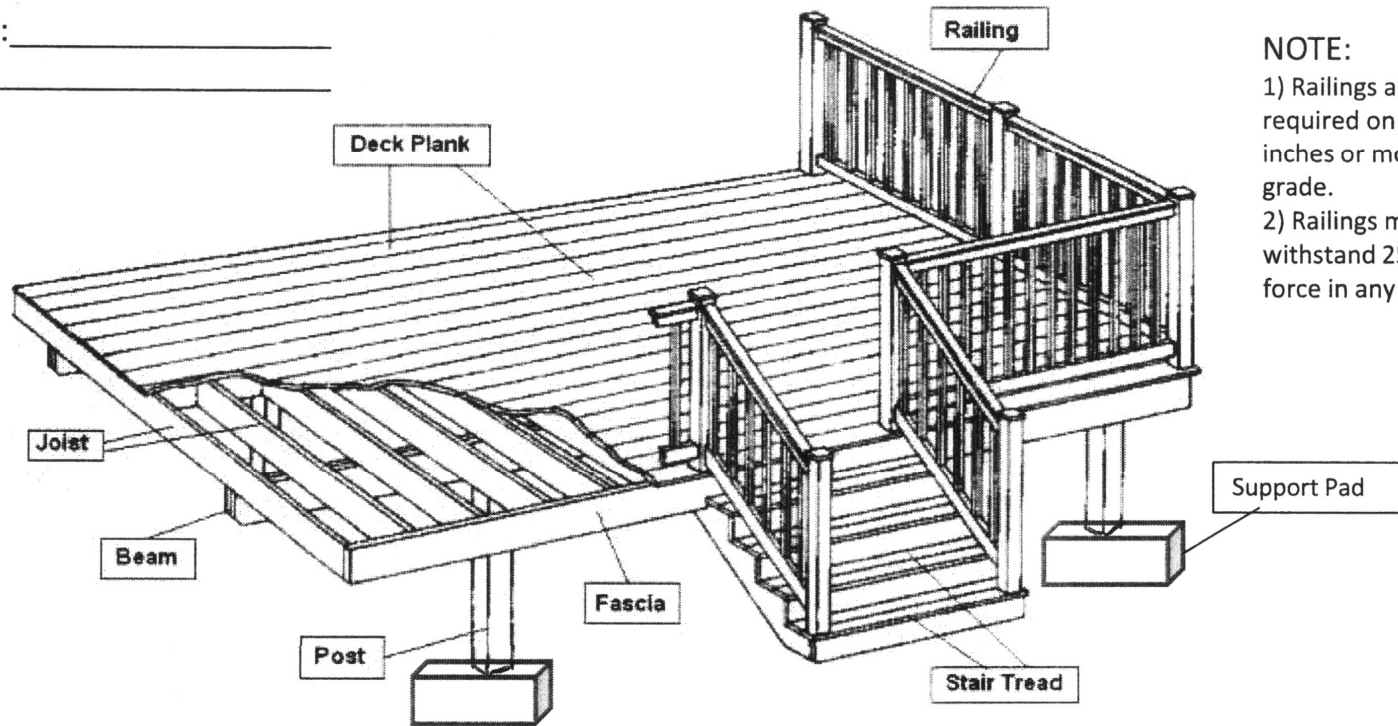

**NOTE:**

1) Railings are required on decks 30-inches or more above grade.

2) Railings must withstand 250 lbs of force in any direction.

Deck dimensions \_\_\_\_\_ X \_\_\_\_\_, deck height from grade \_\_\_\_\_ feet

Support pad type \_\_\_\_\_ and size \_\_\_\_\_ X \_\_\_\_\_, depth below grade \_\_\_\_\_ inches

Support post type \_\_\_\_\_ and size \_\_\_\_\_ X \_\_\_\_\_, on-center spacing \_\_\_\_\_

Support beam type \_\_\_\_\_ and size \_\_\_\_\_ X \_\_\_\_\_ double ☐ or single ☐

Floor joists \_\_\_\_\_ X \_\_\_\_\_, spacing \_\_\_\_\_ on center, span length \_\_\_\_\_ feet

Deck plank type \_\_\_\_\_ and size \_\_\_\_\_ X \_\_\_\_\_

Railing post type \_\_\_\_\_ and size \_\_\_\_\_ X \_\_\_\_\_

Top and bottom rail type \_\_\_\_\_ and size \_\_\_\_\_ X \_\_\_\_\_, spindle type \_\_\_\_\_